





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRB/4-315 Ø 315mm /4 Ip

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRB/4-315	1	240	4	120	1400	41	.59

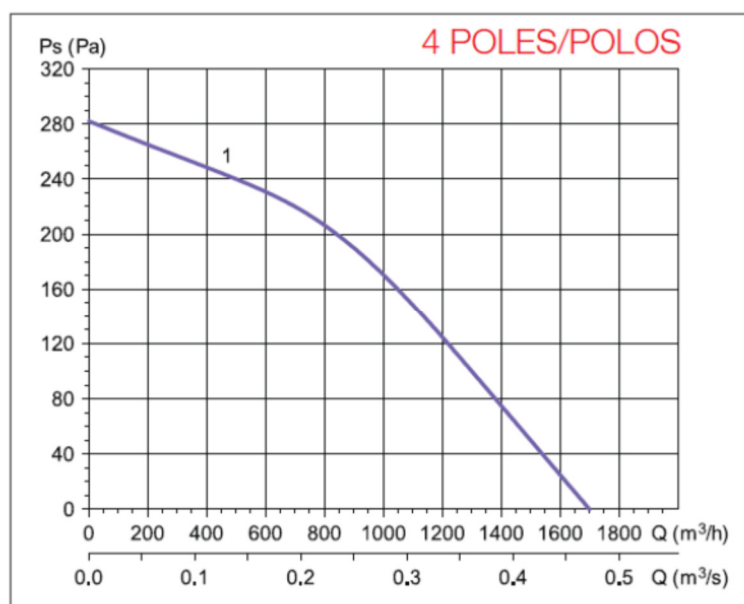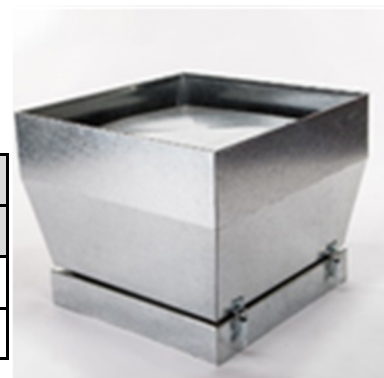


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

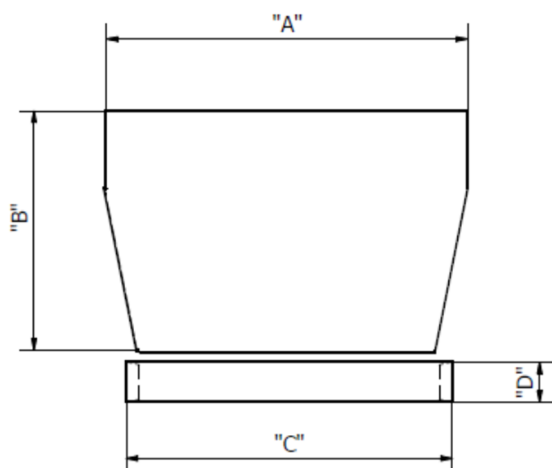

Dimension (mm)	"A"	"B"	"C"	"D"
	510	435	450	75

Wiring Diagram

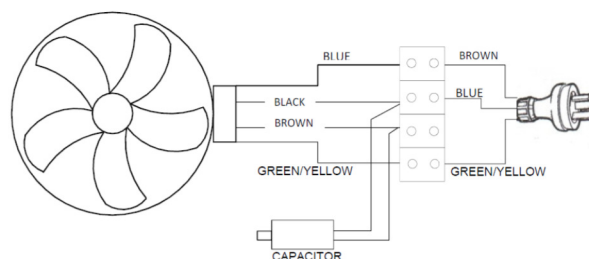





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRB/4-355 Ø 355mm /4 Ip

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRB/4-355	1	240	4	230	2800	48	1.16

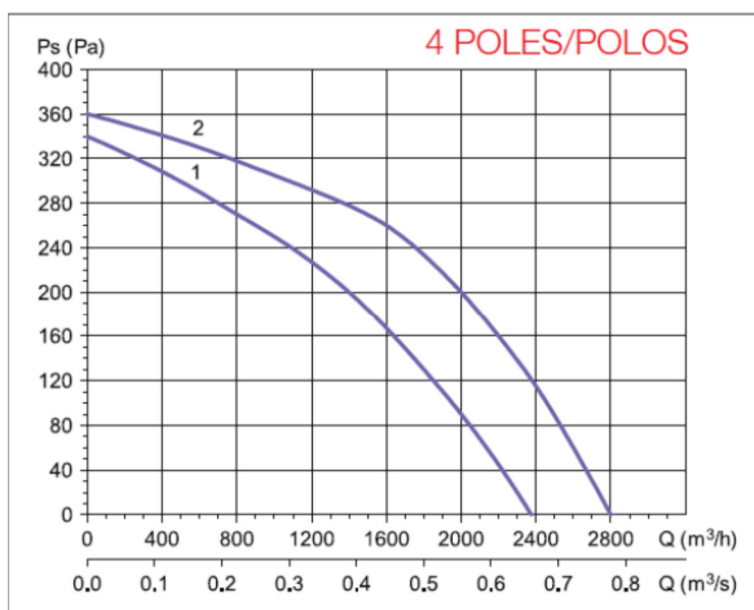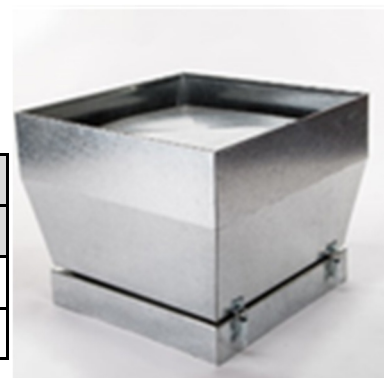


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

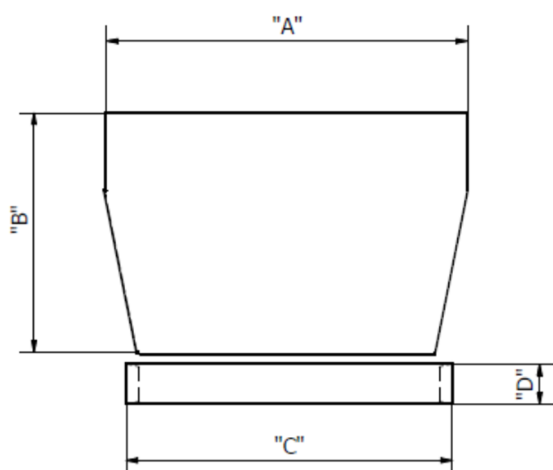

Dimension (mm)	"A"	"B"	"C"	"D"
	510	435	450	75

Wiring Diagram

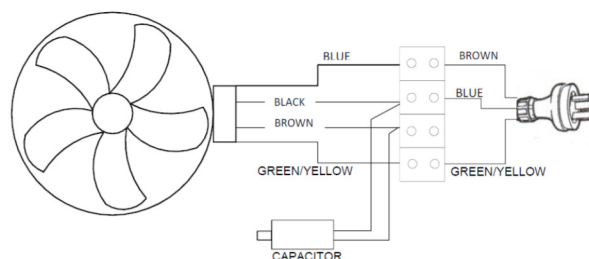





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRB/4-400 Ø 400mm /4 Ip

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRB/4-400	3	240	4	370	1415	57	1.64

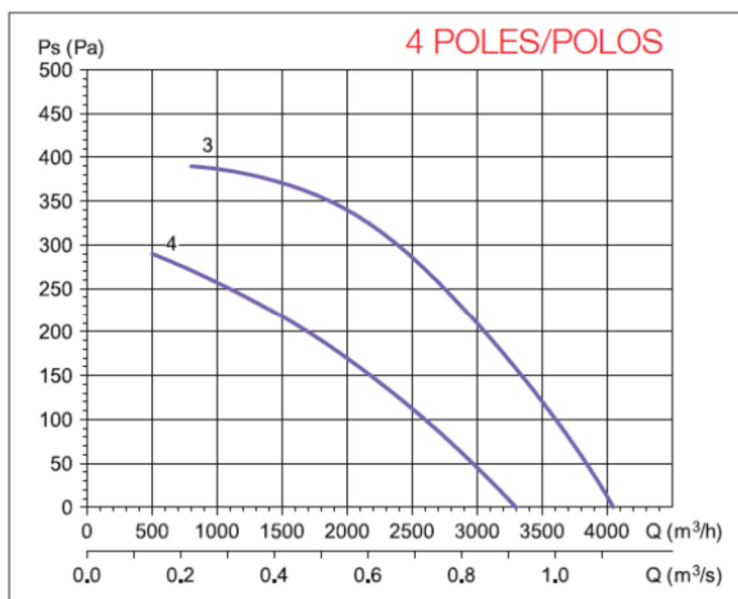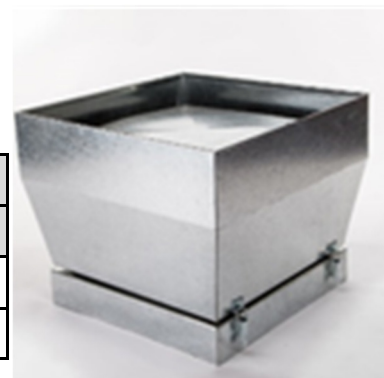


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

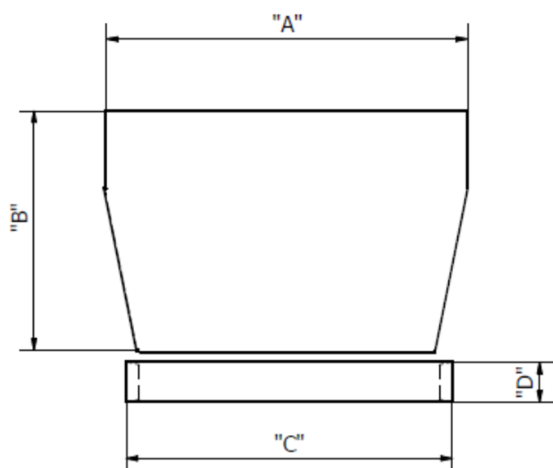

Dimension (mm)	"A"	"B"	"C"	"D"
	670	495	600	75

Wiring Diagram

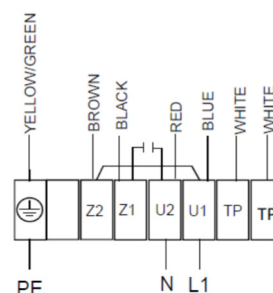





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRB/4-450 Ø 450mm /4 Ip

Type	Curve #	Voltage	Frequency	Power	Speed	Noise Level	Current
		V	Hz	W	RPM	dBA @ 3m	Amps
CRRB/4-450	3	240	50	540	1350	60	2.4

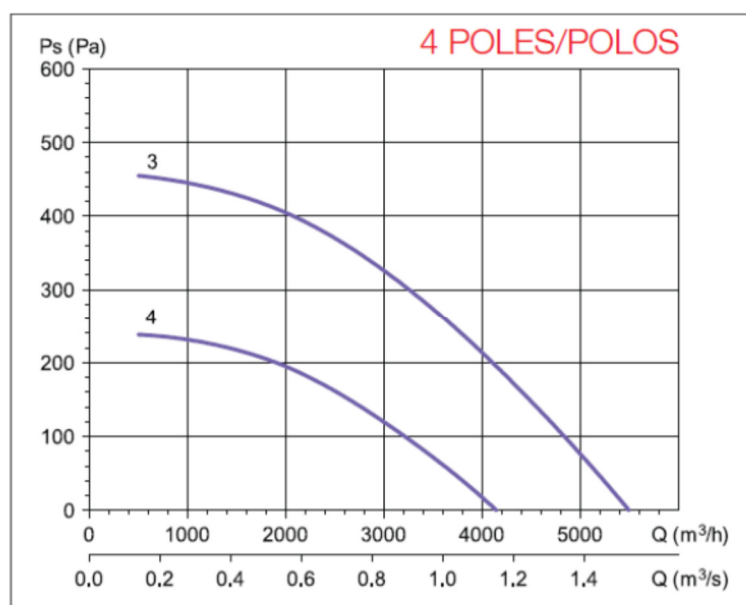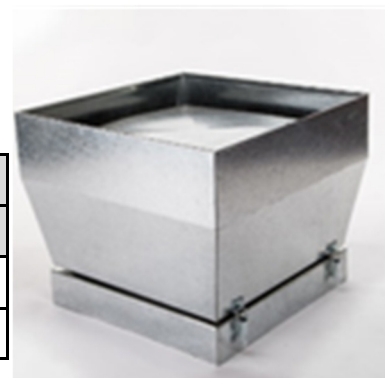


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

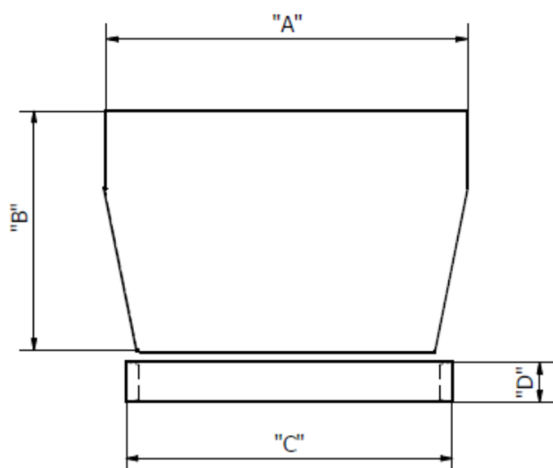

Dimension (mm)	"A"	"B"	"C"	"D"
	670	495	600	75

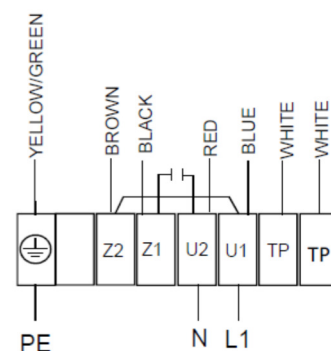





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRB/4-500 Ø 500mm /4 Ip

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRB/4-500	1	240	4	1050	1340	62.5	4.7

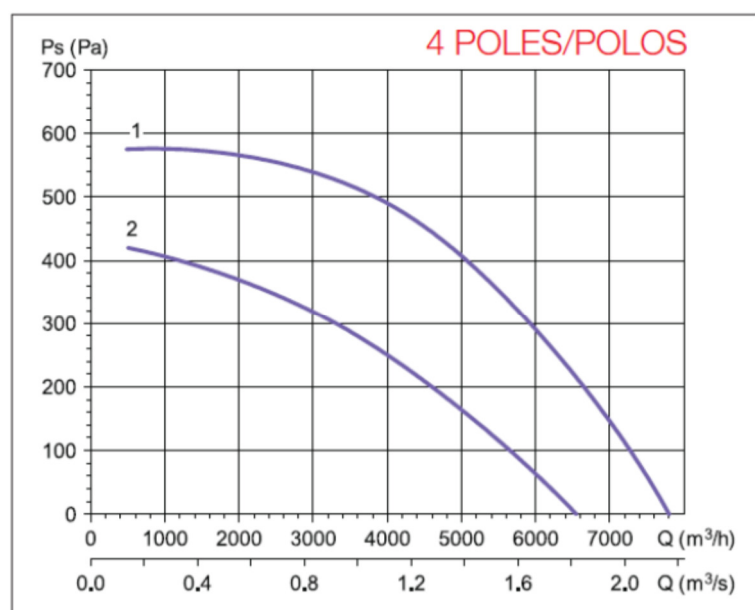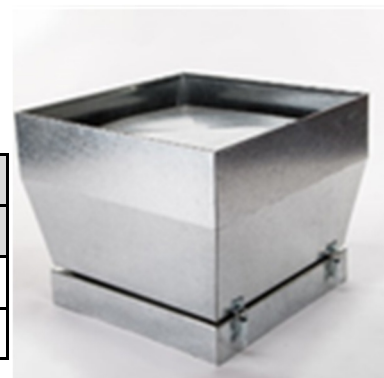


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

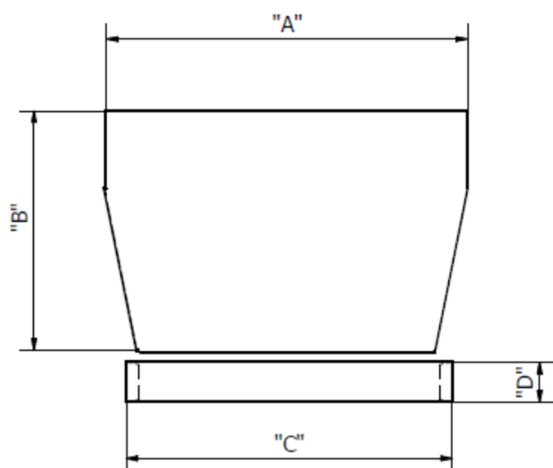

Dimension (mm)	"A"	"B"	"C"	"D"
	900	560	750	100

Wiring Diagram

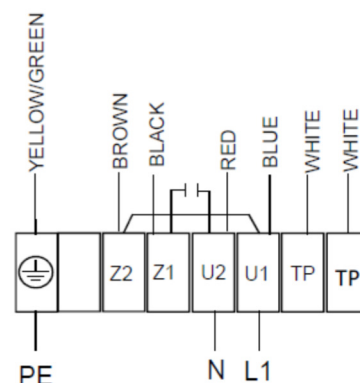





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRB/6-500 Ø 500mm /6 Ip

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRB/6-500	3	240	6	320	815	53.5	1.4

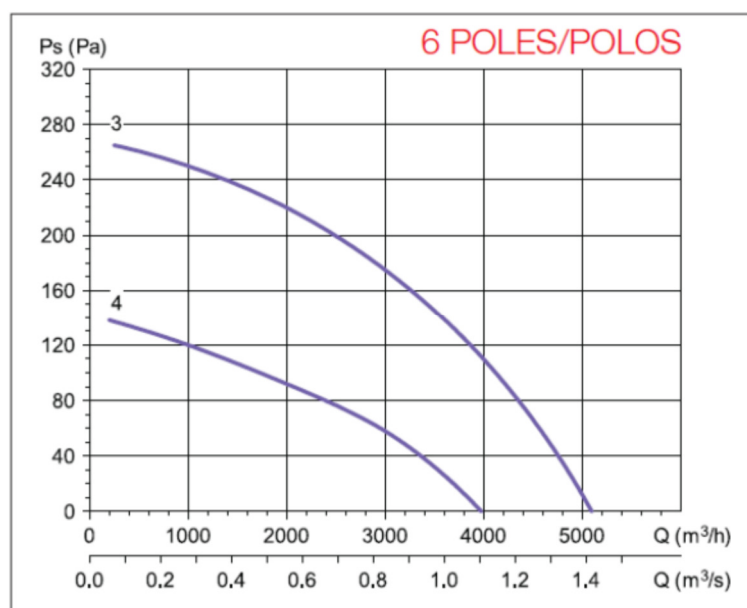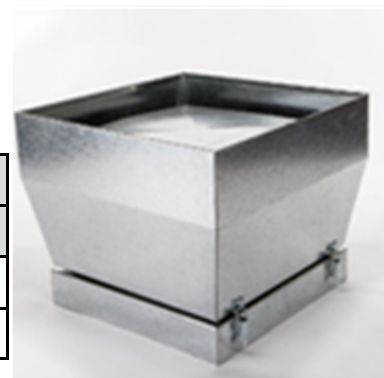


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

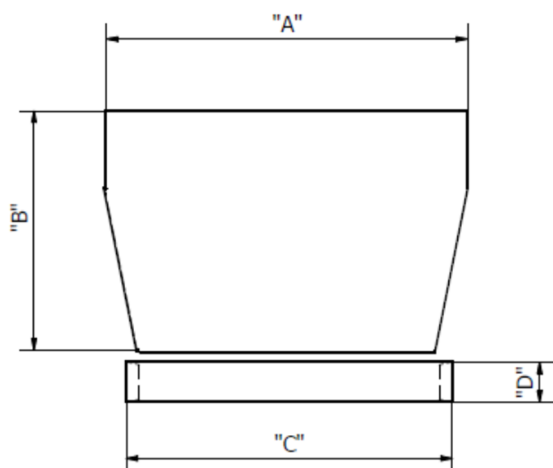

Dimension (mm)	"A"	"B"	"C"	"D"
	900	560	750	100

Wiring Diagram

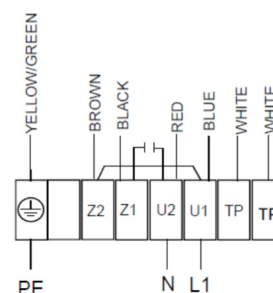





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRB/6-560 Ø 560mm /6 Ip

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRB/6-560	3	240	6	585	860	57.5	2.7

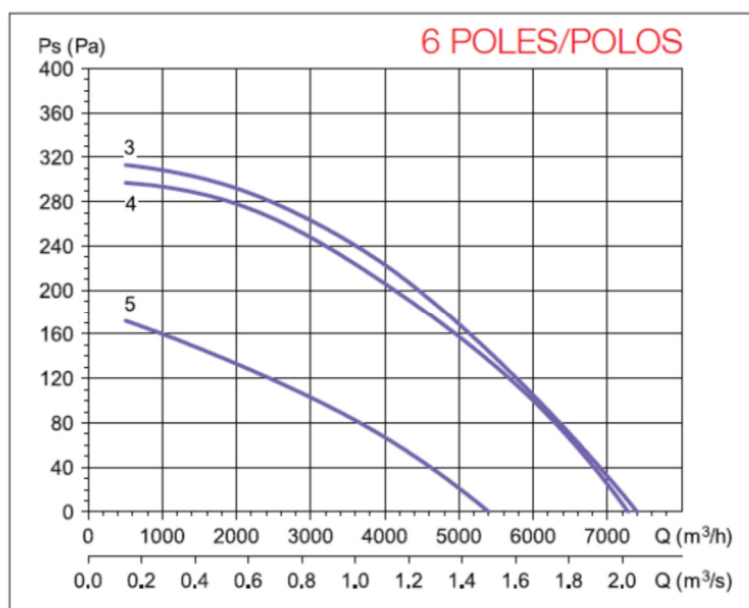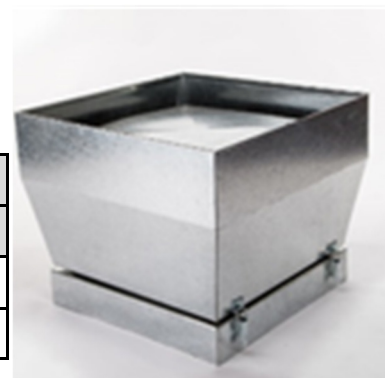


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

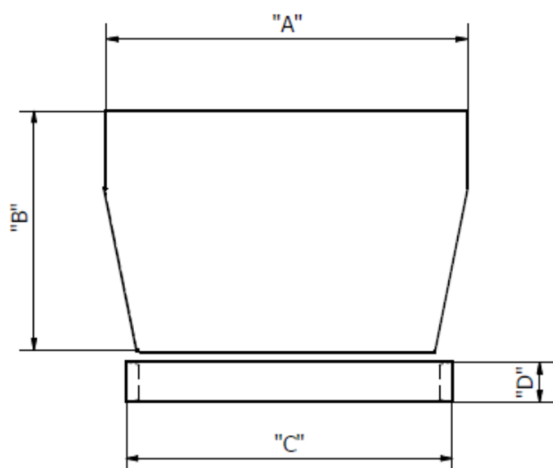

Dimension (mm)	"A"	"B"	"C"	"D"
	900	560	750	100

Wiring Diagram

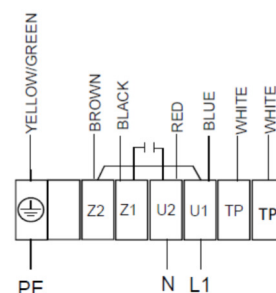





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRT/4-560 Ø 560mm /4 3p

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRT/4-560	1	415Δ	4	1700	1240	66.5	3
	2	415Y	4	920	882	57.5	1.8

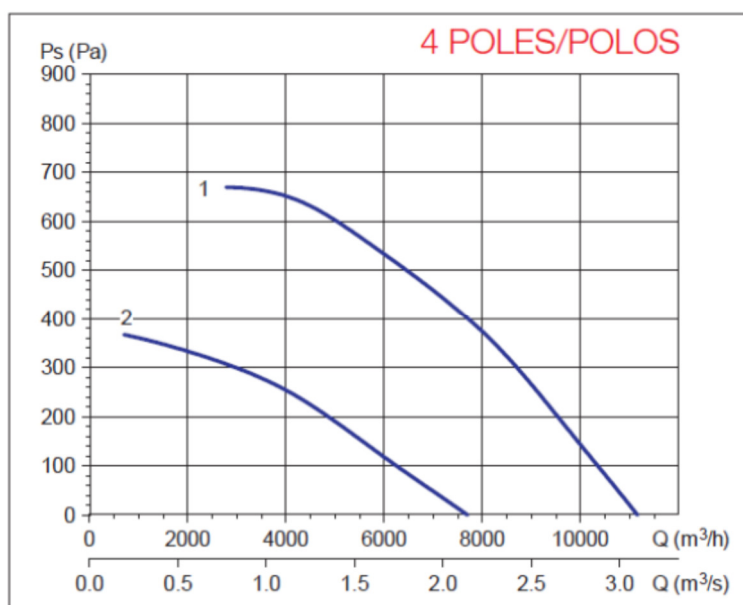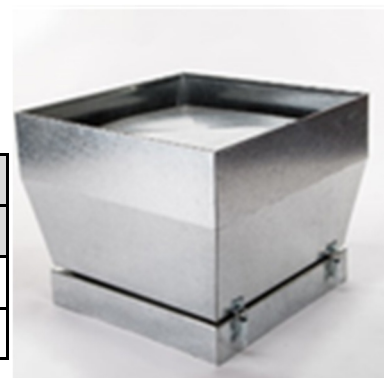


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

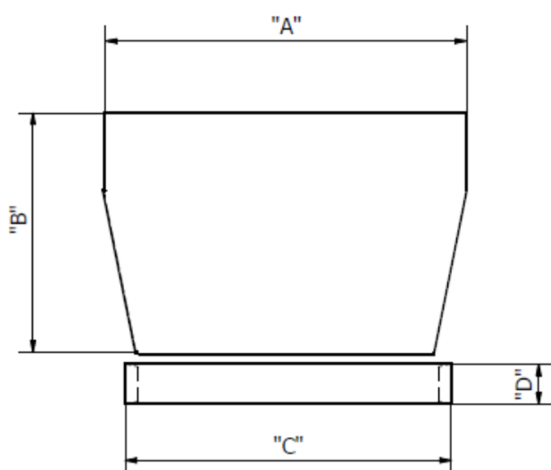

Dimension (mm)	"A"	"B"	"C"	"D"
	900	560	750	100

Wiring Diagram

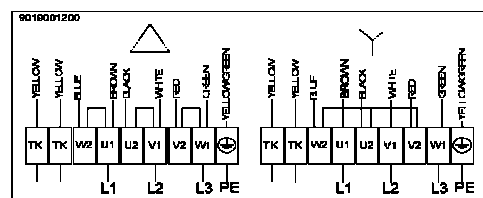





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRT/4-630 Ø 630mm /4 3p

Type	Curve #	Voltage	Frequency	Power	Speed	Noise Level	Current
		V	Hz	W	RPM	dBA @ 3m	Amps
CRRT/4-630	1	415	4	3550	1300	72.5	5.9
	2	415	4	2200	1015	66.5	3.6

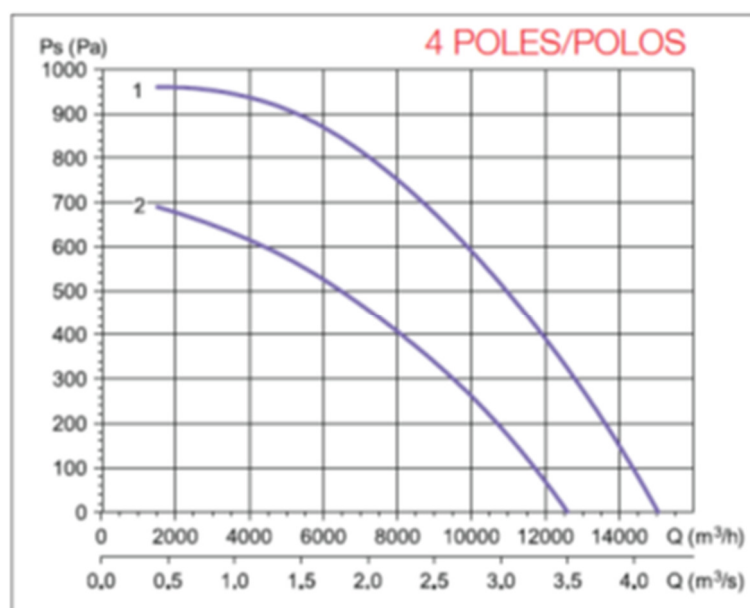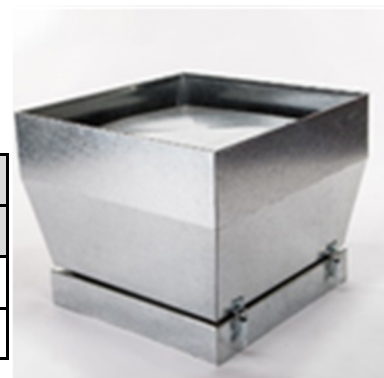

Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

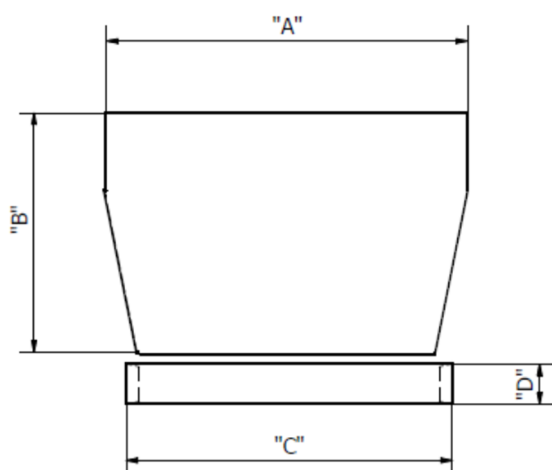

Dimension (mm)	"A"	"B"	"C"	"D"
	1180	900	850	100





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRT/4-500 Ø 500mm /4 3p

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRT/4-500	1	415Δ	4	1100	1350	63.3	1.91
	2	415Y	4	770	1085	57.5	1.25

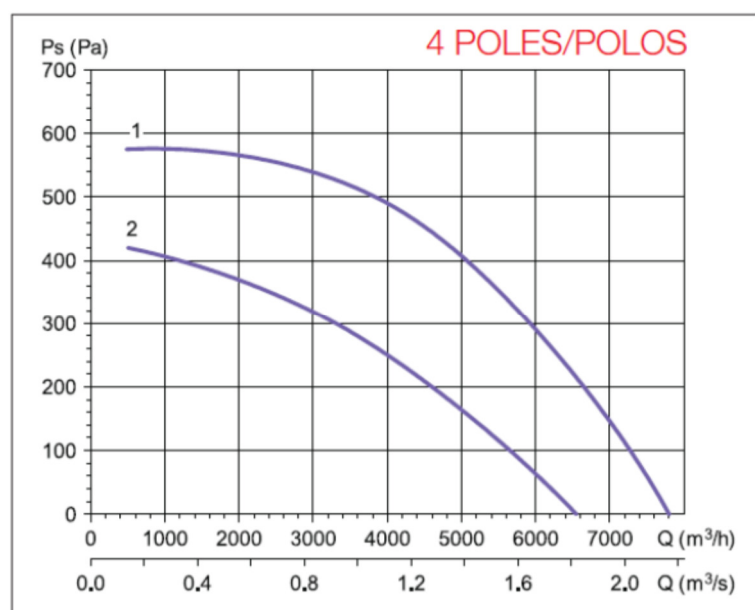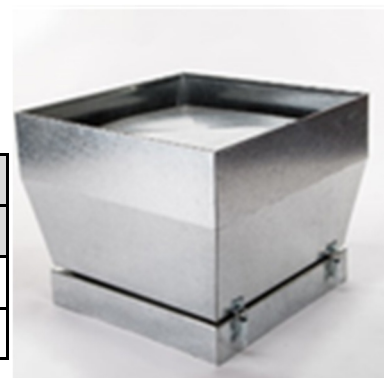


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

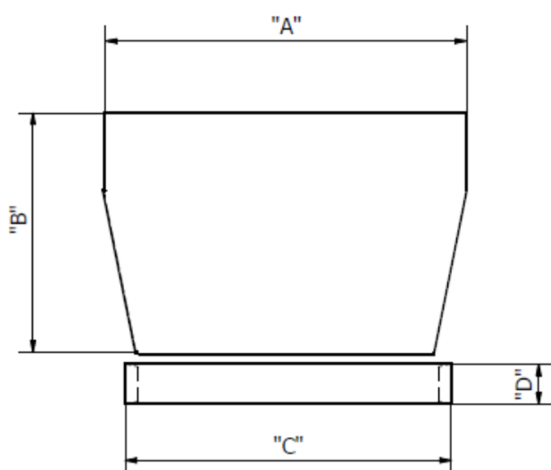

Dimension (mm)	"A"	"B"	"C"	"D"
	900	560	750	100

Wiring Diagram

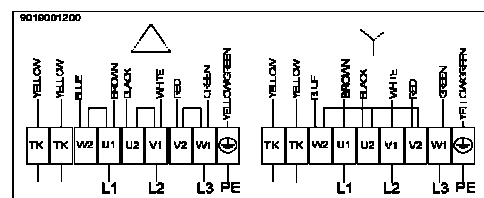





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRT/6-630 Ø 630mm /6 3p

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRT/6-630	3	415 Δ	6	960	875	61.5	1.9
	4	415 Y	6	640	685	51.5	1.2

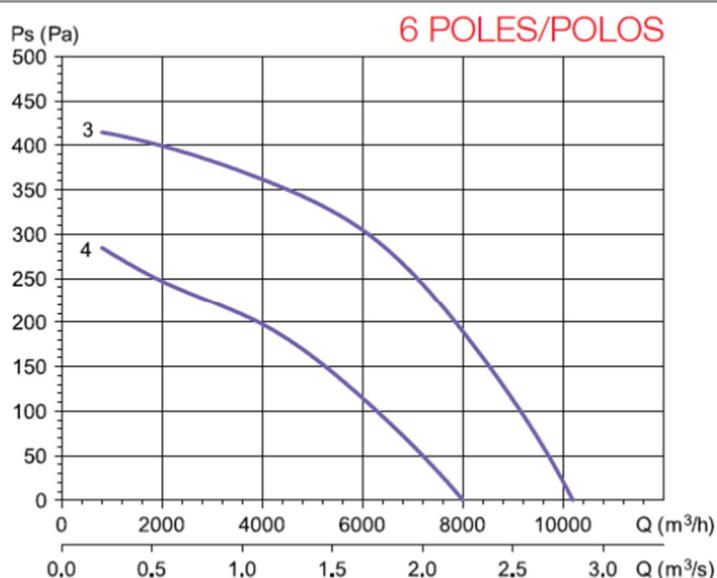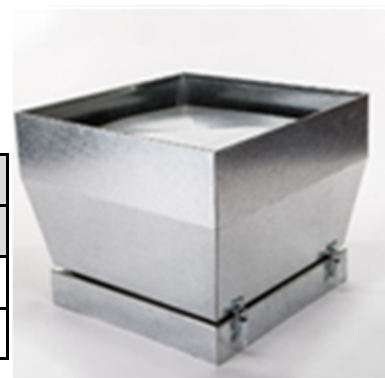


Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

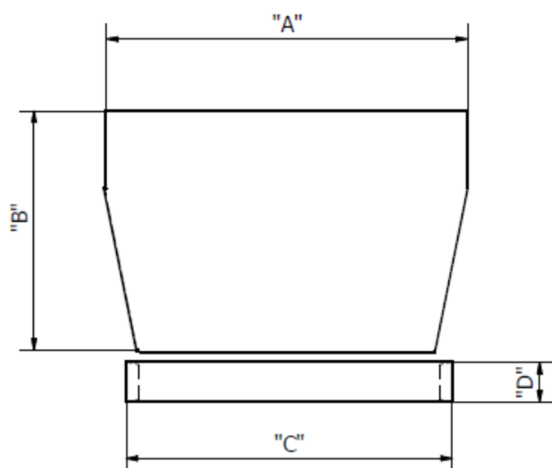

Dimension (mm)	"A"	"B"	"C"	"D"
	1180	900	850	100

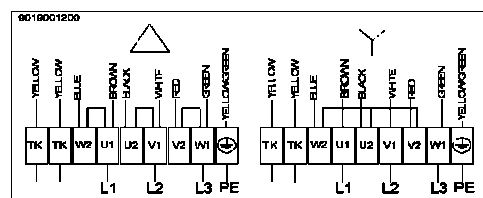





CRONIN

FABRICATION

CRONIN FABRICATION PTY LTD. 10 ROSSLYN ST MILE END. SA. 5031. admin@cronin.com.au
www.cronin.com.au PH. (08) 8234 0096. FAX (08) 8352 7815. ABN 14 008 026 480


CRRT/6-710 Ø 710mm /6 3p

Type	Curve #	Voltage	# Poles	Power	Speed	Noise Level	Current
		V		W	RPM	dBA @ 3m	Amps
CRRT/6-710	1	415Δ	6	2200	930	63.5	5.3
	2	415Y	6	1650	800	58.5	3

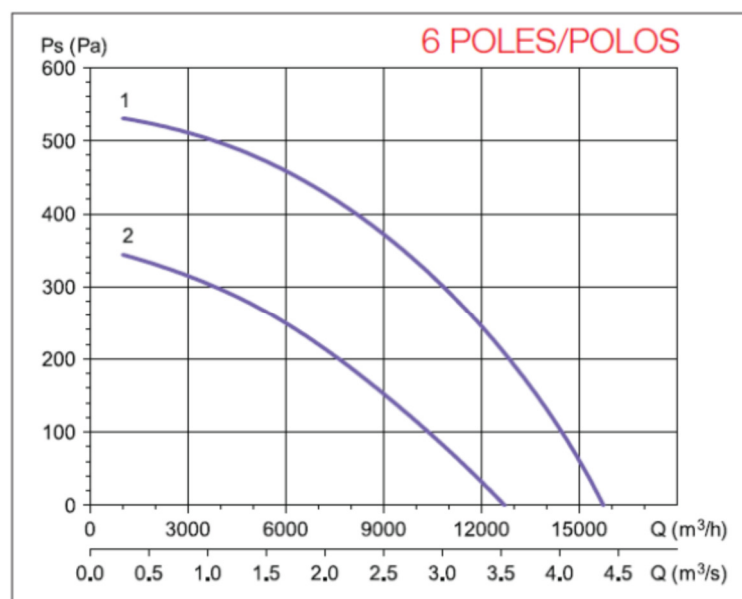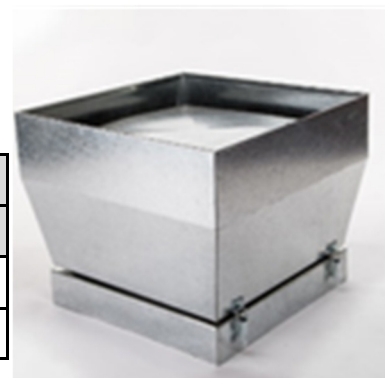

Cronin's range of roof mount fans includes both single phase (240V) and three phase (410V) backward curved centrifugal impellers. Incorporating Rotorex Solar and Palau external rotor style motors, the vertical discharge roof fans are constructed from sturdy sheet metal and can be powder coated upon request.

For ease of access to the motor for cleaning and maintenance, the units include release latches, allowing the wind band to be easily and quickly removed. Bird mesh is available as an extra.

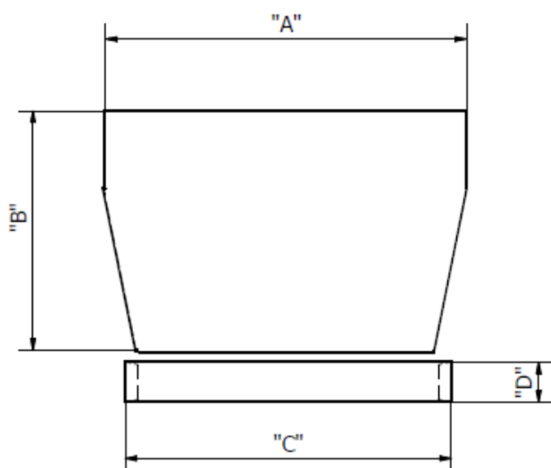

Dimension (mm)	"A"	"B"	"C"	"D"
	1180	900	850	100

Wiring Diagram

